

UniLED IsoSafe Airtight Black 630lm 3000K Ra 98 Trailing edge dimming

Article code: **904323**
 EAN: 7021989043232



Electrical

Wattage: 7W
 System wattage: 8.5W
 Voltage: 230V

Light technic

Type of light source: LED (not exchangeable)
 Socket: CoB Holder
 Light source included: Yes
 Luminous flux: 630lm
 Efficacy: 74 lm/W
 Colour temperature: 3000K
 Colour rendering (CRI): Ra 98
 MacAdams factor: SDCM: 2
 Lifetime: L90/B10>50,000
 Light distribution: Direct
 Optic: Reflector
 Beam angle: 42°

Control/Dimming

Type: Trailing edge dimming

Protection

Luminaire class: Class II SELV

Energy and approvals

Energy class (2021-): F

Materials and finish

Housing: Aluminium
 Colour: Black (RAL 9004)
 Optics: Tempered glass

Mounting/Connection




Mounting: Recessed, Indoor / Outdoor
 Plug: Screwless terminal block
 Max. luminaires per circuit breaker: B10: 77, B16: 123, C10: 77, C16: 123

Dimensions (mm)

Height (H): 37
 Diameter (D): 94
 Cut-out: 76
 Ceiling void depth: 35
 Distance to flammable materials: 0mm
 Weight (brutto/netto): 0.48 / 0.4

Packaging

Packing dimensions: 115 x 100 x 95

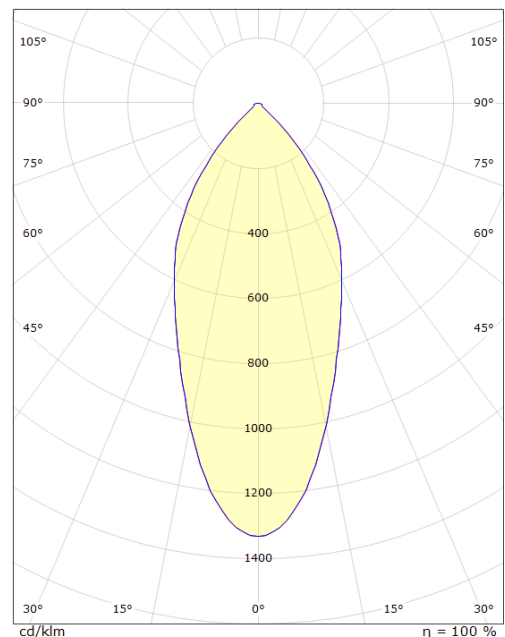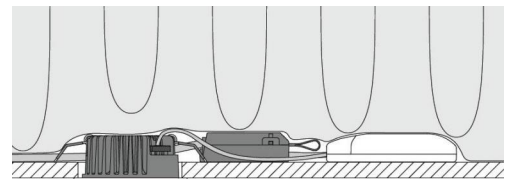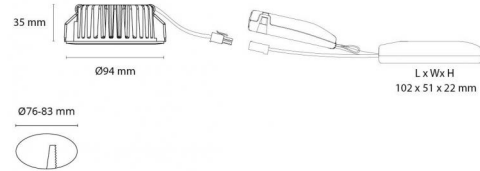

7 0 2 1 9 8 9 0 4 3 2 3 2